

(12) **United States Patent**  
**Migliore et al.**

(10) **Patent No.:** **US 9,644,859 B2**  
(45) **Date of Patent:** **May 9, 2017**

(54) **DIRECTIONAL AIR JET SYSTEM FOR AIR REGISTER**

(71) Applicants: **Michael Migliore**, Duluth, GA (US);  
**Maria Migliore**, Duluth, GA (US)

(72) Inventors: **Michael Migliore**, Duluth, GA (US);  
**Maria Migliore**, Duluth, GA (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 385 days.

(21) Appl. No.: **14/514,486**

(22) Filed: **Oct. 15, 2014**

(65) **Prior Publication Data**  
US 2015/0111486 A1 Apr. 23, 2015

**Related U.S. Application Data**  
(60) Provisional application No. 61/893,515, filed on Oct. 21, 2013.

(51) **Int. Cl.**  
**F24F 7/00** (2006.01)  
**F24F 13/06** (2006.01)  
**F24F 13/08** (2006.01)  
**F24F 13/065** (2006.01)

(52) **U.S. Cl.**  
CPC ..... **F24F 13/065** (2013.01)

(58) **Field of Classification Search**  
CPC ..... F24F 13/06; F24F 13/082; F24F 13/20;  
F24F 13/065

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,974,580 A *	3/1961	Aleksa .....	F24F 13/065
			239/457
3,319,560 A	5/1967	Schaaf	
3,366,363 A *	1/1968	Hogan .....	F24F 13/065
			251/4
3,884,134 A	5/1975	Jordan	
4,080,882 A *	3/1978	Bruns .....	F24F 13/062
			454/299
4,142,456 A *	3/1979	Locker .....	F24F 13/06
			239/502
4,576,331 A *	3/1986	Harwell .....	F24F 7/065
			236/49.1
4,716,818 A *	1/1988	Brown .....	F24F 13/10
			251/252
4,794,851 A *	1/1989	Kurrle .....	F24F 13/065
			454/286
4,848,669 A *	7/1989	George .....	B64D 13/00
			239/539


(Continued)

*Primary Examiner* — Steven B McAllister  
*Assistant Examiner* — Jonathan Cotov  
(74) *Attorney, Agent, or Firm* — Bryan W. Bockhop;  
Bockhop Intellectual Property Law, LLC

(57) **ABSTRACT**

A directional air jet system includes a body frame. The body frame defines a cavity therein. A plurality of pedestals is affixed to the body frame and each has a pedestal surface. A plurality of magnets is each affixed to a different one of the pedestal surfaces and are couple the body frame to the air vent. A turret extends outwardly from the hole defined by the lateral surface and is configured to rotate about a first axis. A ball nozzle is pivotally fit into the turret and defines a bottom opening that is in fluid communication with the cavity through the turret. The ball nozzle is configured to rotate about a second axis that is transverse to the first axis so as to be configured to direct air from the air vent as an air jet in a user-selected direction.

**17 Claims, 4 Drawing Sheets**

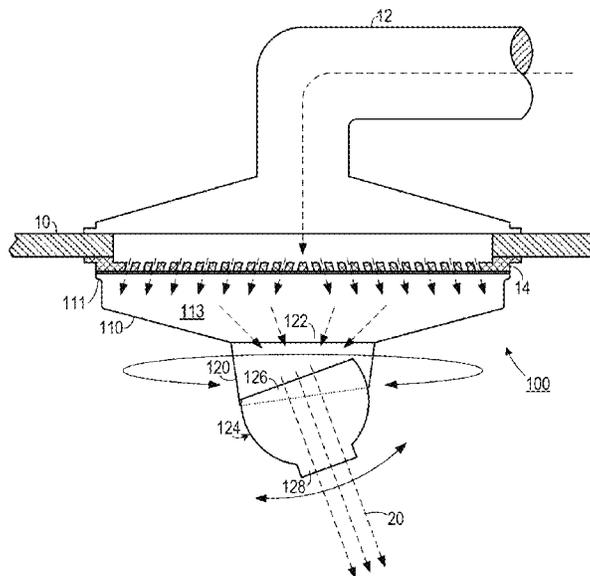

(56)

**References Cited**

U.S. PATENT DOCUMENTS

5,501,634 A *	3/1996	Wilder	.....	B60H 1/00378	8,460,075 B2 *	6/2013	Mavroudis	.....	F24F 13/084
				454/109					454/275
5,584,761 A *	12/1996	Locker	.....	F24F 13/062	8,778,042 B2 *	7/2014	Albert	.....	F24F 13/20
				454/302					55/373
5,807,171 A *	9/1998	Felsen	.....	F24F 13/06	9,360,230 B2 *	6/2016	Breed	.....	F24F 13/20
				454/296	2002/0069599 A1 *	6/2002	Dhallan	.....	F24F 13/082
6,135,878 A *	10/2000	Felsen	.....	F24F 13/075					52/302.1
				454/296	2005/0262719 A1 *	12/2005	Calbreath	.....	F26B 21/004
6,554,880 B1 *	4/2003	Northcutt	.....	B01D 46/0006					34/239
				454/292	2008/0160904 A1 *	7/2008	Yi	.....	F24F 13/12
6,719,623 B1 *	4/2004	Kodaveridan	.....	B64D 13/00					454/309
				454/154	2008/0227382 A1 *	9/2008	Profeta	.....	F24F 13/06
6,797,028 B2 *	9/2004	Duffy	.....	B01D 46/001					454/358
				454/187	2009/0302544 A1 *	12/2009	Pugh, Jr.	.....	F16J 15/122
7,645,188 B1 *	1/2010	Peerbolt	.....	F24F 13/06					277/312
				454/284	2010/0233953 A1 *	9/2010	Mavroudis	.....	F24F 13/084
7,651,390 B1 *	1/2010	Profeta	.....	F24F 13/06					454/276
				454/284	2012/0052787 A1 *	3/2012	Zecha	.....	F24F 13/065
8,292,708 B2 *	10/2012	Viggers	.....	F24F 13/20					454/289
				454/275	2013/0059520 A1	3/2013	Wolf et al.		
8,342,923 B2 *	1/2013	Mavroudis	.....	F24F 13/082	2013/0331023 A1 *	12/2013	Yalmeh	.....	F24F 13/1426
				454/275					454/275

\* cited by examiner

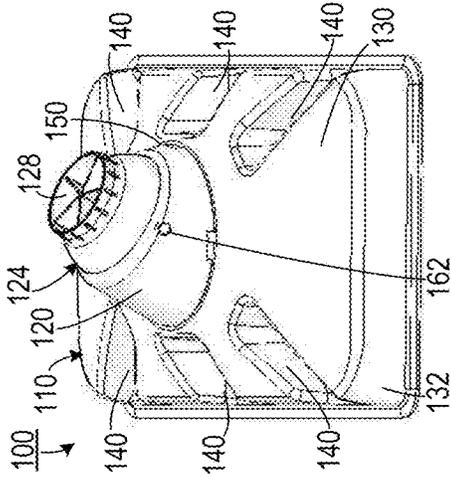


FIG. 1A

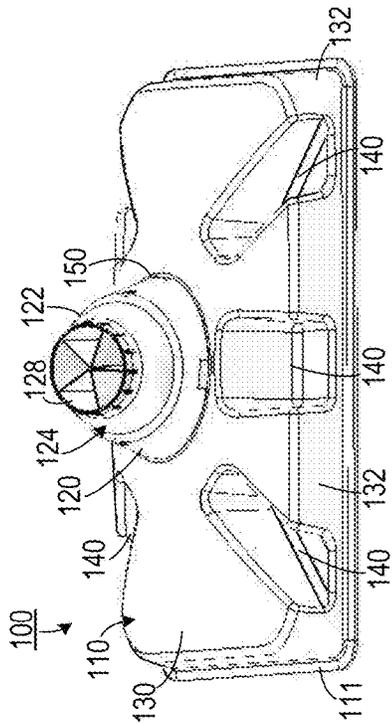


FIG. 1B

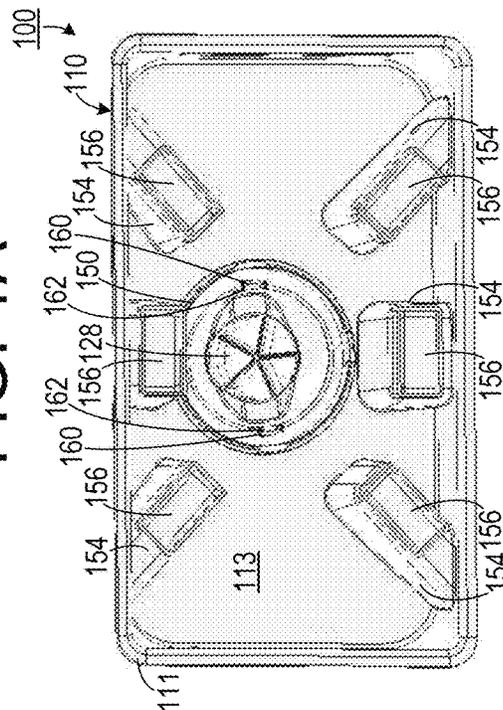


FIG. 1C

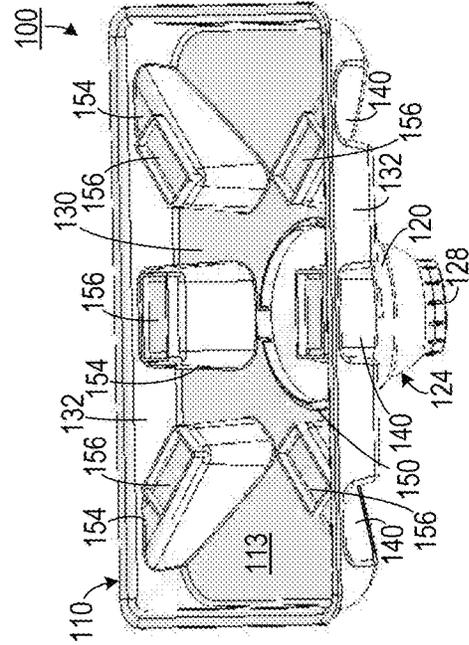


FIG. 1D

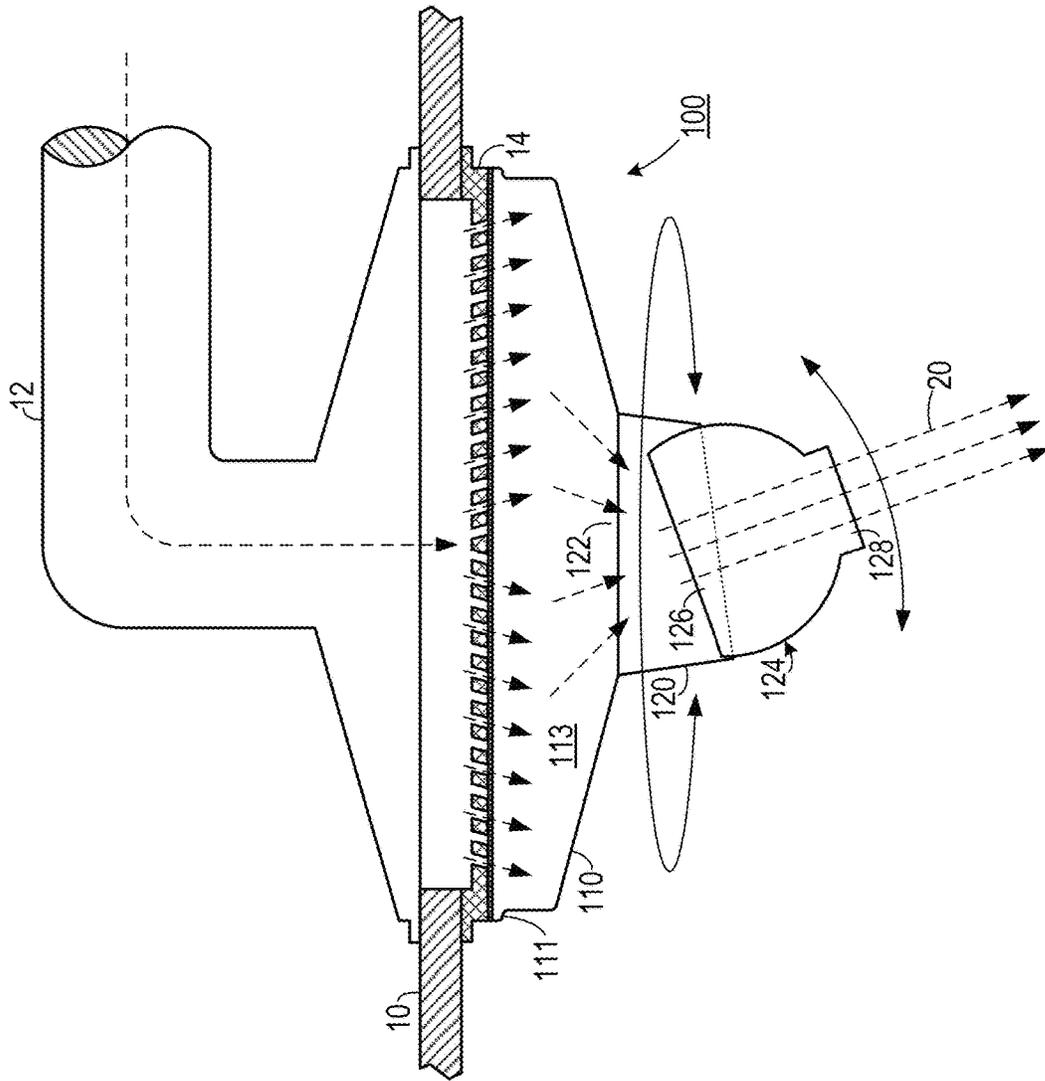


FIG. 2

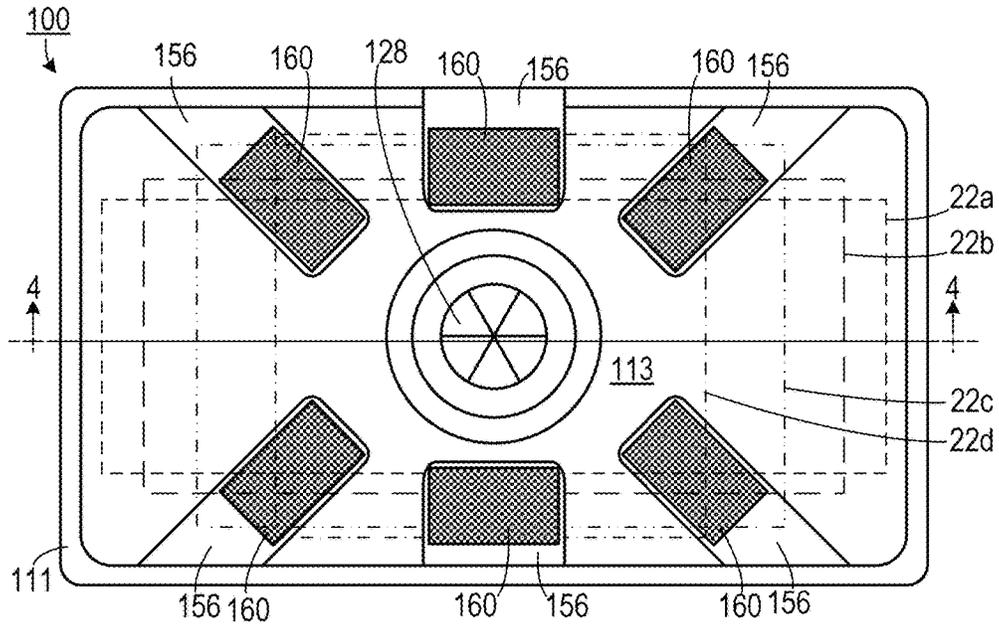


FIG. 3

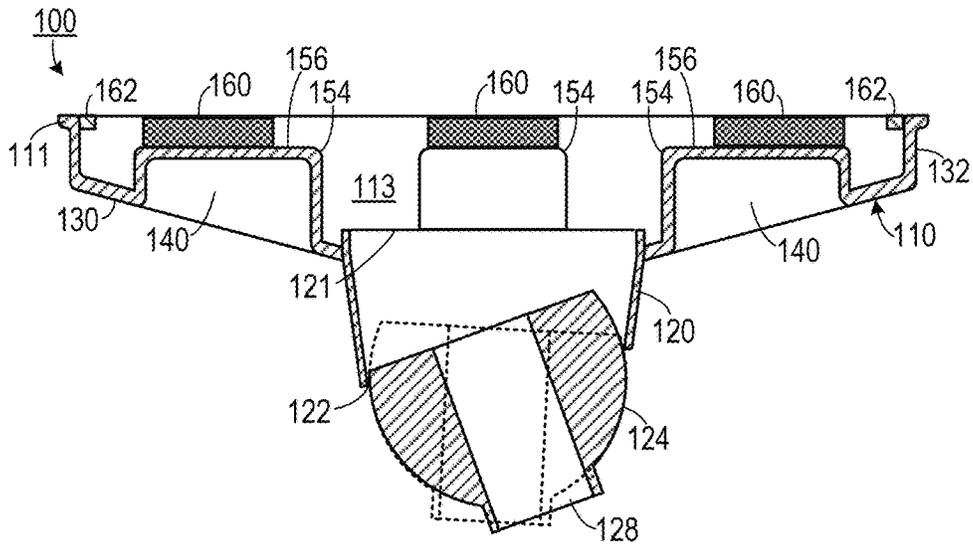


FIG. 4

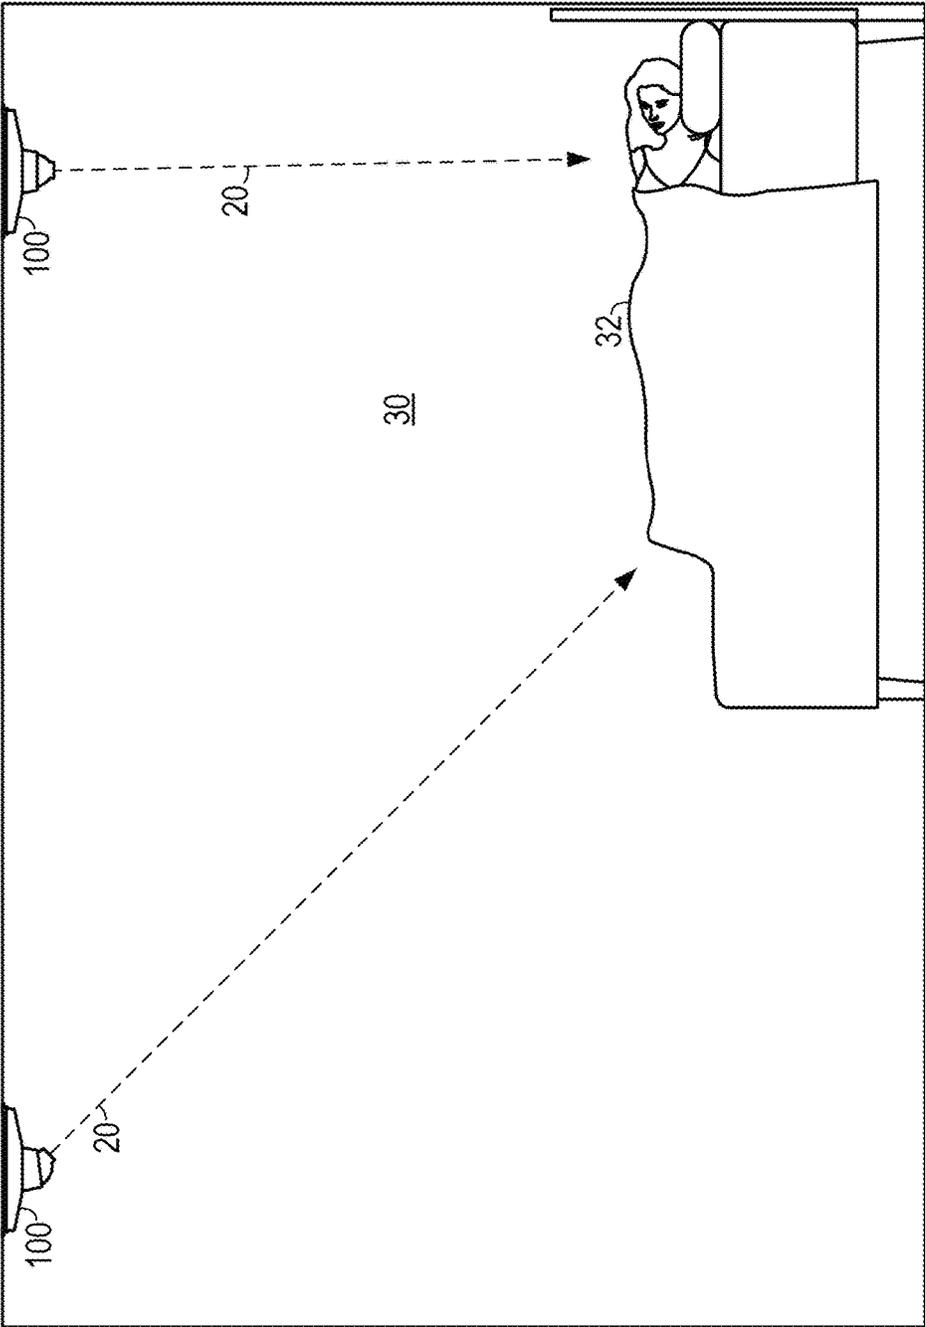


FIG. 5

1

**DIRECTIONAL AIR JET SYSTEM FOR AIR REGISTER****CROSS-REFERENCE TO RELATED APPLICATION(S)**

This application claims the benefit of US Provisional Patent Application Ser. No. 61/893,515, filed Oct. 21, 2013, the entirety of which is hereby incorporated herein by reference.

**FIELD OF THE INVENTION**

The present invention relates to air ventilation systems and, more specifically, to an attachment to an air register for directing an air jet to a desired location.

**DESCRIPTION OF THE RELATED ART**

Typical residential air ventilation systems include air ducts that transport air from a heating and cooling system to air registers located in different rooms throughout a house. Some registers are relatively close to the heating and cooling system, whereas other registers can be much farther away from the heating and cooling system. With some systems, there can be a substantial air pressure drop at the more distant registers. This can result in less air being delivered to inhabitants of distant rooms.

Existing systems used to alleviate discomfort in such distant rooms typically involve boosting airflow through a duct with a fan disposed in a register. Such systems usually require an electrical connection, which is frequently manifested as an electrical cord that is plugged into a wall outlet. Such systems have the disadvantages of being unsightly and being limited in range by the length of the electrical cord. Also, these systems often must be installed by removing an existing register and replacing it with a booster system.

Even in rooms that are closer to the heating and cooling unit, some users desire enhanced airflow. For example, people experiencing hot flashes often prefer air flow directed at a specific location.

Therefore, there is a need for a device that directs airflow from a register to a specific location.

**SUMMARY OF THE INVENTION**

The disadvantages of the prior art are overcome by the present invention which, in one aspect, is a directional air jet system for directing air from a vent register that includes a body frame having a foot surface and a shape configured to cover substantially the vent register. The body frame defines a cavity in fluid communication with the vent register. The cavity opens to a circular hole passing therethrough. A frustoconical member is disposed in the circular hole and is engaged with the body portion. The frustoconical member defines a circular top opening and an elliptical bottom opening. The frustoconical member is configured to rotate within the circular hole. A ball nozzle is disposed within the elliptical bottom opening and engaged with the frustoconical member. The ball nozzle is configured to rotate relative to the frustoconical member. The ball nozzle defines a nozzle opening that is in fluid communication with the vent register through the circular hole, the circular top opening and the elliptical bottom opening, so that air passing through the nozzle opening forms a jet that flows in a selected direction.

2

At least one magnet is affixed to the foot surface and is configured to attach the directional air jet system to the vent register.

In another aspect, the invention is a directional air jet system for directing air from an air vent that includes a body frame. The body frame has a peripheral wall and a lateral surface extending upwardly from the peripheral wall. The peripheral wall and the lateral surface define a cavity therein that opens to a hole defined by the lateral surface. The peripheral wall terminates in a foot edge that defines an open base opposite from the lateral surface that is in fluid communication with the cavity and that is configured to overlay the air vent. A plurality of pedestals is affixed to the body frame and is disposed inside the cavity. Each of the plurality of pedestals has a pedestal surface that is spaced apart by a predetermined distance from a plane defined by the foot edge. A plurality of magnets is each affixed to a different one of the pedestal surfaces and has a thickness corresponding to the predetermined thickness. The plurality of magnets is configured to removably couple the body frame to the air vent. The plurality of magnets has a distribution and dimensions so as to be configured to couple the body frame to a variety of different air vent sizes. A turret extends outwardly from the hole defined by the lateral surface and is configured to rotate about a first axis. A ball nozzle is pivotally fit into the turret and defines a bottom opening that is in fluid communication with the cavity through the turret. The ball nozzle is configured to rotate about a second axis that is transverse to the first axis so as to be configured to direct air from the air vent as an air jet in a user-selected direction.

In another aspect, the invention is a peripheral ledge extending inwardly from the foot edge of the peripheral wall and configured to deflect air inwardly toward the cavity.

These and other aspects of the invention will become apparent from the following description of the preferred embodiments taken in conjunction with the following drawings. As would be obvious to one skilled in the art, many variations and modifications of the invention may be effected without departing from the spirit and scope of the novel concepts of the disclosure.

**BRIEF DESCRIPTION OF THE FIGURES OF THE DRAWINGS**

FIG. 1A is a front isometric projection of one embodiment of a directional air jet system.

FIG. 1B is a side-view isometric projection of the embodiment shown in FIG. 1A.

FIG. 1C is an underside plan view of the embodiment shown in FIG. 1A.

FIG. 1D is an underside-view isometric projection of the embodiment shown in FIG. 1A.

FIG. 2 is a schematic representation of one embodiment applied to a vent register.

FIG. 3 is an underside plan view of the directional air jet system shown in FIG. 1A showing disposition of magnets.

FIG. 4 is a cross section of one embodiment of the directional air jet system shown in FIG. 3, taken along line 4-4.

FIG. 5 is a schematic representation a directional air jet system in use.

**DETAILED DESCRIPTION OF THE INVENTION**

A preferred embodiment of the invention is now described in detail. Referring to the drawings, like numbers indicate

like parts throughout the views. Unless otherwise specifically indicated in the disclosure that follows, the drawings are not necessarily drawn to scale. As used in the description herein and throughout the claims, the following terms take the meanings explicitly associated herein, unless the context clearly dictates otherwise: the meaning of “a,” “an,” and “the” includes plural reference, the meaning of “in” includes “in” and “on.”

As shown in FIGS. 1A-1D and 2-5, one embodiment is a system **100** for directing a jet **20** of air from a vent register **14** associated with duct **12** from a heating and cooling system. Typically, the vent register **14** is attached to a wall, a ceiling **10** or a floor of a room and the system **100** overlays the vent register **14**.

The directional air jet system **100** includes a body frame **110** having a foot edge **111** that is shaped so that it covers the vent register **14**. Flat magnets **160** are affixed to the body frame **110** and are used to affix the system **100** against the vent register **14**. (Other methods of affixing the system **100** to the vent register **14** may also be used, including: two-sided tape, fasteners, etc.) The body frame **110** includes a peripheral wall **132** and a lateral surface **130** extending from the peripheral wall **132**. The peripheral wall **132** and the lateral surface **130** define the cavity **113**. The foot edge **111** defines an open base opposite from the lateral surface **130** that is in fluid communication with the cavity **113** and that is configured to overlay the air vent **14**.

The body frame **110** defines a cavity **113** in fluid communication with the vent register **14** (air flow from the duct **12** through the register **14** and the system is shown with broken lines in FIG. 2). The cavity **113** opens to a circular hole **150** passing therethrough. A frustoconical turret member **120** is disposed in the circular hole **150**, is engaged with the body frame **110** and is configured to rotate within the hole **150** (by 360° in one embodiment). The frustoconical member **120** defines a circular top opening **121** and an elliptical bottom opening **122**, which is on a plane that is transverse to the plane of the circular top opening. A ball nozzle **124** is disposed in and engaged with the elliptical bottom opening **122** so as to be able to rotate transversely with respect to the frustoconical member **120**. In one embodiment, the ball nozzle **124** includes oppositely disposed pins **162** that fit into pin joists **160** defined by the frustoconical member **120** at pivot points so that the ball nozzle **124** can rotate by pivoting. The ball nozzle **124** pivots along an axis that is transverse to the rotational axis of the turret **120**, thereby allowing the system **100** to direct air in almost any user selected direction from the vent **14**. The ball nozzle defines a nozzle opening **128** that is in fluid communication with the vent register **14** and a bottom opening **128** that forms air passing through the nozzle opening **128** into a jet **20** that flows in a direction desired by the user.

In one embodiment, the body frame **110** defines a plurality of pedestals **154**, affixed to the body frame and disposed inside the cavity **113**. Each of the pedestals **154** has a pedestal surface **156** that is spaced apart from a plane defined by the foot edge **111** by a distance corresponding to the width of the magnets **160**, so that the magnets **160** are able to engage the vent **14** when the system **100** is placed against the vent **14**. As shown specifically in FIG. 3, the magnets **160** (which may be elongated rectangular in shape) are distributed so that they can couple the body frame **110** to overlay a variety of different air vent sizes **22a-22d**. As shown in FIG. 4, the pedestals **154** can be formed as indentations **140** in the body frame **110** that provide a gripping surface that allows the user to remove the system **100** from the vent at will.

In one embodiment, the body frame **110**, the frustoconical member **120** and the ball nozzle **124** are injection molded and made of acrylonitrile butadiene styrene (ABS). As will be readily appreciated by those of skill in the art, these elements may also be made from many other materials, including other plastics and metals and made through other processes.

In one embodiment, a peripheral ledge **162** can extend inwardly from the foot edge **111** of the peripheral wall **132**. The ledge **162** deflect air inwardly toward the cavity **113**. In one embodiment, the ledge **162** can be a weather stripping gasket disposed peripherally about the inside of the foot edge **111**. In another embodiment, it can be a rubber band that is stretched about the foot edge **111** so as to have an edge extending into the cavity **113**.

As shown in FIG. 5, directional air jet systems **100** can be placed on several different vent registers in a room **30**. The user **32** can then adjust each system to direct air to a specific desired location.

One embodiment is an accessory to any existing steel floor, wall, or ceiling register vent. With its one-size-fits all design, it magnetically mounts to the face of a vent. Self-powered, without the use of batteries or electric, it strictly utilizes the exiting thermodynamics of the ambient air pressure at any such vent, compressing the existing out-bound air into a chamber, and forcing it out as a jet stream with enough force to move warm or cool air across a room. The multi-directional nozzle permits the user the ability to direct and control the air to where it best fits their needs.

The above described embodiments, while including the preferred embodiment and the best mode of the invention known to the inventor at the time of filing, are given as illustrative examples only. It will be readily appreciated that many deviations may be made from the specific embodiments disclosed in this specification without departing from the spirit and scope of the invention. Accordingly, the scope of the invention is to be determined by the claims below rather than being limited to the specifically described embodiments above.

What is claimed is:

1. A directional air jet system for directing air from an air vent, comprising:
  - (a) a body frame having a peripheral wall and a lateral surface extending from the peripheral wall, the peripheral wall and the lateral surface defining a cavity therein that opens to a hole defined by the lateral surface, the peripheral wall terminating in a foot edge that defines an open base opposite from the lateral surface that is in fluid communication with the cavity and that is configured to overlay the air vent;
  - (b) a plurality of pedestals affixed to the body frame and disposed inside the cavity, each of the plurality of pedestals having a pedestal surface that is spaced apart by a predetermined distance from a plane defined by the foot edge;
  - (c) a plurality of magnets each affixed to a different one of the pedestal surfaces and having a thickness corresponding to the predetermined distance, the plurality of magnets configured to removably couple the body frame to the air vent, the plurality of magnets having a distribution and dimensions so as to be configured to couple the body frame to a variety of different air vent sizes;
  - (d) a turret extending outwardly from the hole defined by the lateral surface and configured to rotate about a first axis;

5

(e) a ball nozzle pivotally fit into the turret and defining a bottom opening that is in fluid communication with the cavity through the turret, the ball nozzle configured to rotate about a second axis that is transverse to the first axis so as to be configured to direct air from the air vent as an air jet in a user-selected direction; and

(f) a plurality of indentations in an outside surface of the body frame that are configured to provide a gripping surface, wherein the indentations in the outside surface of the body frame form the pedestals inside the cavity.

2. The directional air jet system of claim 1, wherein the turret has a frustoconical shape with an open bottom and an open top, the open top having a greater diameter than the open bottom, the open top having a shape that is complementary to the hole defined by the lateral surface and the open bottom having a shape that corresponds to the ball nozzle.

3. The directional air jet system of claim 2, wherein the turret has a top edge that lies along a first plane and a bottom edge that lies along a second plane, wherein the first plane is parallel to the air vent and wherein the second plane is transverse to the first plane.

4. The directional air jet system of claim 1, wherein the turret is configured to rotate 360° about the first axis.

5. The directional air jet system of claim 1, wherein the magnets comprise elongated rectangular magnets.

6. The directional air jet system of claim 1, further comprising a peripheral ledge extending inwardly from the foot edge of the peripheral wall and configured to deflect air inwardly toward the cavity.

7. The directional air jet system of claim 1, wherein the turret defines two oppositely disposed pin bosses and wherein the ball nozzle is coupled to the turret by two oppositely disposed pins disposed along the second axis that are fit into the pin bosses.

8. The directional air jet system of claim 1, wherein the body frame, the plurality of pedestals, the turret and the ball nozzle each comprise an injection molded plastic.

9. The directional air jet system of claim 8, wherein the plastic comprises acrylonitrile butadiene styrene.

10. A directional air jet device for directing air from an air vent, comprising:

(a) a body frame having a peripheral wall and a lateral surface extending upwardly from the peripheral wall, the peripheral wall and the lateral surface defining a cavity therein that opens to a hole defined by the lateral surface, the peripheral wall terminating in a foot edge that defines an open base opposite from the lateral surface that is in fluid communication with the cavity and that is configured to overlay the air vent;

(b) a plurality of indentations formed in the body frame, each indentation having an inside surface disposed inside the cavity, the inside surface of each indentation including a pedestal surface that is spaced apart by a predetermined distance from a plane defined by the foot edge;

(c) a plurality of elongated rectangular magnets each affixed to a different pedestal surface and having a thickness corresponding to the predetermined distance, the plurality of magnets configured to removably couple the body frame to the air vent, the plurality of magnets having a distribution and dimensions so as to be configured to couple the body frame to a variety of different air vent sizes;

(d) a frustoconically-shaped turret extending outwardly from the hole defined by the lateral surface and configured to rotate 360° about a first axis, the turret having

6

a top edge that lies along a first plane and a bottom edge that lies along a second plane, the first plane being parallel to the air vent and the second plane being transverse to the first plane; and

(e) a ball nozzle pivotally fit into the turret and defining a bottom opening that is in fluid communication with the cavity through the turret, the ball nozzle configured to rotate about a second axis that is transverse to the first axis so as to be configured to direct air from the air vent as an air jet in a user-selected direction.

11. The directional air jet device of claim 10, wherein each of the plurality of indentations has an outsider surface that is configured to provide a gripping surface.

12. The directional air jet device of claim 10, wherein the turret has an open bottom and an open top, the open top having a greater diameter than the open bottom, the open top having a shape that is complementary to the hole defined by the lateral surface and the open bottom having a shape that corresponds to the ball nozzle.

13. The directional air jet device of claim 10, further comprising a peripheral ledge extending inwardly from the foot edge of the peripheral wall and configured to deflect air inwardly toward the cavity.

14. The directional air jet device of claim 10, wherein the turret defines two oppositely disposed pin bosses and wherein the ball nozzle is coupled to the turret by two oppositely disposed pins disposed along the second axis that are fit into the pin bosses.

15. The directional air jet device of claim 10, wherein the body frame, the plurality of pedestals, the turret and the ball nozzle each comprise an injection molded plastic.

16. The directional air jet device of claim 15, wherein the plastic comprises acrylonitrile butadiene styrene.

17. A directional air jet vent cover, comprising:

(a) an acrylonitrile butadiene styrene body frame having a peripheral wall and a lateral surface extending upwardly from the peripheral wall, the peripheral wall and the lateral surface defining a cavity therein that opens to a hole defined by the lateral surface, the peripheral wall terminating in a foot edge that defines an open base opposite from the lateral surface that is in fluid communication with the cavity and that is configured to overlay the air vent;

(b) a plurality of indentations formed in the body frame, each indentation having an inside surface disposed inside the cavity, the inside surface of each indentation including a pedestal surface that is spaced apart by a predetermined distance from a plane defined by the foot edge, each of the plurality of indentations has an outsider surface that is configured to provide a gripping surface;

(c) a plurality of elongated rectangular magnets each affixed to a different pedestal surface and having a thickness corresponding to the predetermined distance, the plurality of magnets configured to removably couple the body frame to the air vent, the plurality of magnets having a distribution and dimensions so as to be configured to couple the body frame to a variety of different air vent sizes;

(d) an acrylonitrile butadiene styrene frustoconically-shaped turret extending outwardly from the hole defined by the lateral surface and configured to rotate 360° about a first axis, the turret having a top edge that lies along a first plane and a bottom edge that lies along a second plane, the first plane being parallel to the air

vent and the second plane being transverse to the first plane, the turret defining two oppositely disposed pin bosses;

- (e) an acrylonitrile butadiene styrene ball nozzle pivotally fit into the turret and defining a bottom opening that is in fluid communication with the cavity through the turret, the ball nozzle configured to rotate about a second axis that is transverse to the first axis so as to be configured to direct air from the air vent as an air jet in a user-selected direction, two oppositely disposed pins extending from opposite sides of the ball nozzle along the second axis, the pins fit into the pin bosses; and
- (f) a peripheral ledge extending inwardly from the foot edge of the peripheral wall and configured to deflect air inwardly toward the cavity.

\* \* \* \* \*